


Needle Valve



It activates cylinder valve by breaking Burst Disc.

Manufacturer	DongSung FINETEC Co.,LTD
Model No.	FTN-15
Diameter	6A
Working pressure	1.8MPa
Material	Brass(KS D 5101 C3771)

Flexible Hose

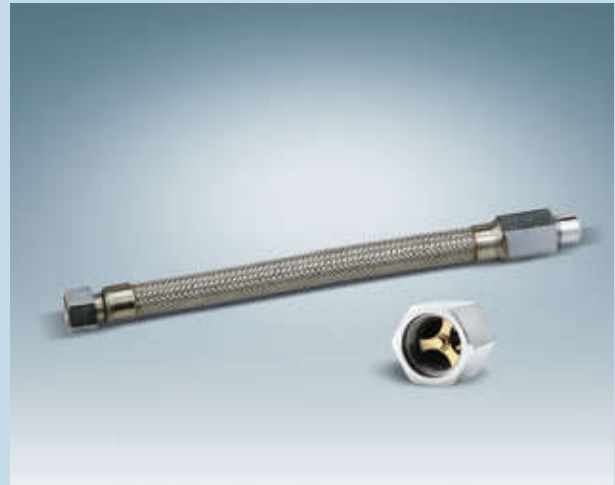

It is located between Cylinder valve and Manifold pipe and comes with check valve which keeps nitrogen gas from flowing backward.

Manufacturer	DongSung FINETEC Co.,LTD
Model No.	FTF-15
Size	15A
Length	450mm
Working pressure	10.0MPa
Test pressure	15.0MPa
Material	Stainless Steel(KS D 3706 STS 304)

3-way control valve



It uses to release quantity of fire extinguishing agent cylinder to cover Enclosure and controls nitrogen gas flow.

Manufacturer	DongSung FINETEC Co.,LTD
Model No.	FIC-9210
Diameter	6A
Working Pressure	10.0MPa
Test Pressure	15.0MPa
Material	Brass(KS D 5101 C3771)

Rubber Tube



A tube made of rubber.
It can substitute copper tube.

Manufacturer	DongSung FINETEC Co.,LTD
Model No.	FTRT-6
Size	6A
Material	Brass(KS D 5101 C3771) & Rubber